TELESTAR 3055FS

MODEL

SERVICE MANUAL

INSTALLATION AND SERVICE ADJUSTMENT

GENERAL INFORMATIONS

All adjustments are thoroughly checked and corrected when the receiver leaves the factory. Therefore the receiver should operate normally and produce proper colour and B/W picture upon installation. However, several minor adjustments may be required depending on the particular location in which the receiver is operated.
This receiver is shipped completely in cardboard carton. Carefully draw out the receiver from the carton and remove all packing materials.
Plus the power cord into a convenient 220 Volts 50 Hz AC two pin power outlet or frequency.
Check and adjust all the customer controls such as BRIGHTNESS, CONTRAST and COLOUR Controls to obtain natural colour or B/W picture.

AUTOMATIC DEGAUSSING

A degaussing coil is mounted around the picture tube so that external degaussing after moving the receiver is normally unnecessary providing the receiver is properly degaussed upon installation. The degaussing coil operates for about 1 second after the receiver is switched ON. If the set is moved or faced in different directon, the power switch must be switched off at least 10 minutes in order that the automatic degaussing circuit operates properly.
Should the chassis or parts of the cabinet become magnetized to cause poor colour purity, use an external degaussing coil. Slowly move the degaussing coil around front of the receiver and slowly withdraw the coil to distance of about 2 m before disconnecting it from AC source. If colour shading still persists, perform the COLOUR PURITY ADJUSTMENT and CONVERGENCE ADJUSTMENTS procedures, as mentioned later.

HIGH VOLTAGE CHECK

CAUTION: There is no HIGH VOLTAGE ADJUSTMENT on this chassis. The +105 volt power supply must be properly adjusted to insure the correct high voltage.

1. Connect an accurate high voltage meter to the anode of the picture tube.
2. Turn on the receiver. Set the BRIGHTNESS and CONTRAST Controls to minimum (zero beam current).
3. High voltage will be measured below 24.5 KV (20"; 25.5 KV)

SERVICE MANUAL

CHASSIS: PL-2

HIGH VOLTAGE TEST :

THERE IS NO HIGH VOLTAGE ADJUSTMENT COMPONENT ON THE CHASSIS. CHANGING OF + 107V DEPENDS ON THE SUPPLY VOLTAGE. IF IT'S NECESSARY TO MEASURE HIGH VOLTAGE;

1) CONNENCT THE + PROBE OF HIGH VOLTAGE TESTER TO THE ANODE OF CPT
2) ADJUST CONTRAST AND BRIGHTNESS TO MINIMUM.
3) MEASURE THE HIGH VOLTAGE AS 23.5KV. THAT VOLTAGE IS 24.5KV FOR 20" (51CM) SCREEN SIZE.
4) FOR MAXIMUM BRIGHTNESS, HIGH VOLTAGE MUST BE 22KV. 22.5KV FOR 51CM.

ADJUSTMENT OF HORIZONTAL OSCILLATOR

)R THE ADJUSTMENT OF HORIZONTAL OSCILLATOR C601 CAPACITOR MUST BE SHORT-CIRCUIT. ADJUST P601, UNTIL OBTAIN AN OPTIMUM STATIONARY PICTURE.

ADJUSTMENT OF HORIZONTAL POSITION

1-APPLY THE CIRCULAR + CROSS-HATCH TEST PATTERN TO RF INPUT.
2- CENTER THE CIRCLE BY USING P601.

ADJUSTMENT OF VERTICAL AMPLITUDE

1- APPLY THE CIRCULAR + CROSS-HATCH TEST PATTERN TO RF INPUT.
2- ADJUST VERTICAL AMPLITUDE TO THE NORMAL LEVEL BY USING P602.

JJUSTMENT OF SUPPLY VOLTAGE

1- MAKE THE VOLUME, BRIGHTNESS AND CONTRAST ADJUSTMENT TO MINIMUM.
2- ADJUST THE SUPPLY VOLTAGE ON THE PIN OF C118 CAPACITOR. AS 107V. BY USING P100.

FOCUS ADJUSTMENT

ADJUST THE THICKNESS OF LINES UNTIL BEING MINIMUM, BY FOCUS TRIMPOT ON THE EHT TRANSFORMER. BY USING CROSS-HATCH OR MULTI-BURST TEST PATTERN.

38.9MHZ PIF ADJUSTMENT

1- DISCONNECT THE IF OUTPUT OF TUNER FROM IF INPUT.
2- APPLY 38.9MHZ WHITE-PICTURE TO IF INPUT.
3- CONNECT THE OSCILLOSCOPE TO VIDEO OUTPUT.
4- ADJUST THE VIDEO SIGNAL BY USING L206 COIL SHOWN IN THE FIGURE 1. (MAX. AMPLITUDE, MIN. OVERSHOOT)
5- MAKE AFT ADJUSTMENT AFTER 38.9MHZ ADJUSTMENT.



Fig.1

AGC DELAY ADJUSTMENT

1- APPLY PAL COLOUR BAR SIGNAL WHICH IS 60dB uV AMPLITUDE (1mV) TO THE RF INPUT.
2- TURN P200 WHICH IS AGC DELAY CONTROL TRIMPOT TO THE CLOCK-WISE UP TO THE END.
3- ADJUST P200 UNTIL FIND A PICTURE WITHOUT SNOWY.

AFT ADJUSTMENT

1- DISCONNECT THE IF OUTPUT OF TUNER FROM IF INPUT.
2- APLY 38.9 MHZ SIGNAL WITH A PM5518 PHILIPS PATTERN GENERATOR TO IF INPUT.
3- CONNECT A DIGITAL VOLTMETER TO AFT PIN OF IF.
4- ADJUST L207 COIL UNTIL THE VOLTAGE OF AFT PIN OF IF IS BEING 6V DC.
5- CONNECT THE IF INPUT WHICH IS DISCONNECTED IN THE BEGINNING.

COLOR SYNC ADJUSTMENT

1- APPLY COLOR BAR SIGNAL TO RF INPUT.
2- CONNECT A 8K2 RESISTOR BETWEEN THE PINS 8 AND 16 OF IC500. ALSO CONNECT PIN 12 TO GROUND (MAKE CONTRAST, BRIGHTNESS AND COLOR ADJUSTMENT TO MIN).
3- ADJUST THE COLOR SYNCRONISATION BY USING CT500 TRIMMER CAP. TO THE BEST POSITION.
4- REMOVE 8K2 RESISTOR AND GROUND CONNECTION.

COLOUR GAIN AND PHASE ADJUSTMENT

1- APPLY PAL DEMODULATOR SIGNAL TO RF INPUT.
2- CONNECT THE OSCILLOSCOPE TO THE BLUE SIGNAL OUTPUT.
3- ADJUST THE HANOVER BARS TO G-Y=0 LEVEL BY USING L501 COIL THEN MAKE MIN -V, + V CHANGING OF THE HANOVER BARS BY USING P500. LIKEWISE, TEST THE OTHER ALTERNATIVES.
SIGNAL : COLOR BAR PATTERN, ADJUSTMENT : P500 MIN. HANOVER BARS.

SECAM CHROMA ADJUSTMENT

1- APPLY SECAM COLOR BAR SIGNAL TO RF INPUT
2- CONNECT THE CHANNEL 1 OF OSCILLOSCOPE TO PIN 3 OF IC 700 AND THE CHANNEL 2 TO PIN 20 OF IC 700. TURN THE P700 TRIMPOT TO THE CLOCK-WISE UP TO MAXIMUM.
3- ADJUST R-Y AND B-Y OUTPUTS TO 600mVPP BY USING P701.
4- CONNECT A 8K2 RESISTOR BETWEEN THE PINS 8 AND 16 OF IC500. ALSO CONNECT PIN 12 TO GROUND.
5- ADJUST THE COLOR SYNC BY USING CT700.

6- DELETE ALL MODIFICATION.
7- CONNECT OSCILLOSCOPE TO THE PIN 3 OF IC700 AND ADJUST THE SIGNAL LEVEL TO MINIMUM BY USING L700 COIL. (BELL FILTER ADJUSTMENT)

SIF DETECTOR ADJUSTMENT

1- APPLY 1KHz SOUND SINGAL WITH TEST PATTERN TO RF INPUT.
2- ADJUST THE MAXIMUM SOUND OUTPUT BY USING L208 WHICH IS SIF DETECTOR COIL.
3- FOR D/K SOUND ADJUSTMENT, ADJUST L209. COIL THEN REPEAT THE A/M STEPS.

WHITE BALANCE ADJUSTMENT

1- APPLY ONLY WHITE-PATTERN TO RF INPUT AND WAIT 15 MINUTE FOR HEATING.
2- ADJUST P904, 905,906 WHICH ARE RGB BIAS CONTROL TRIMPOTS TO ANTI CLOCK-WISE AT REARSIDE
3- ADJUST P902, AND 903 WHICH ARE G,B DRIVER TRIMPOTS TO MIDDLE LEVEL.
4- ADJUST BRIGHTNESS, CONTRAST AND COLOR TO MIN.
5- TURN THE SCREEN VOLTAGE TRIMPOT ON THE EHT TRANSFORMER TO CLOCK-WISE UNTIL APPEAR ANY VISIBLE PICTURE ON THE SCREEN.
6- ADJUST BRIGHTNESS TO 15% DARK PICTURE.
7- ADJUST THE GRAY LEVEL BY USING P904,905,906 AN IDEAL LEVEL.
8- ADJUST BRIGHTNESS AND CONTRAST TO MAX. THAN ADJUST P902 AND 903 WHICH ARE G,B DRIVER TRIMPOTS UNTIL OBTAIN A WHITE LEVEL IF APPEARS ANY COLOR ON THE SCREEN.

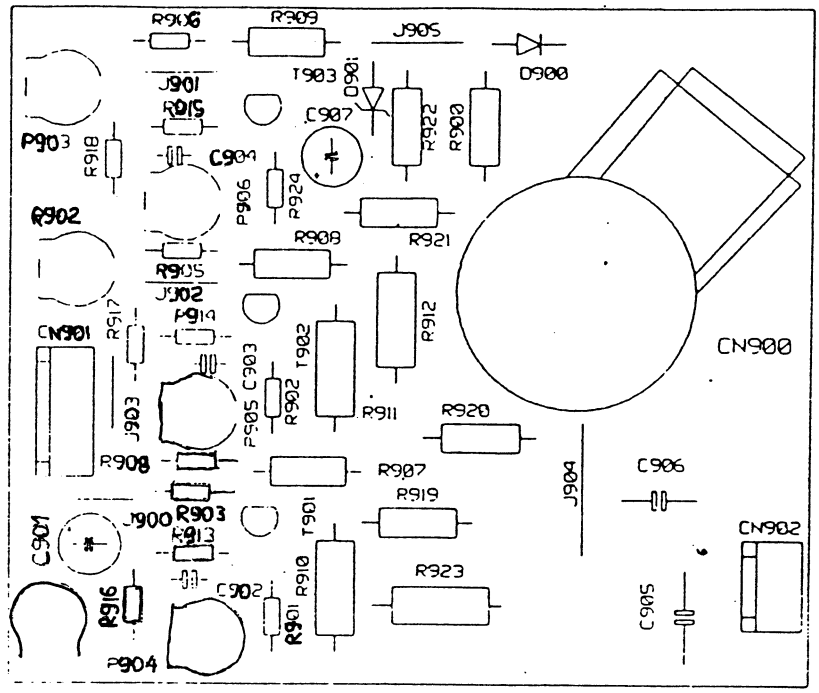

PL2 CRT BOARD

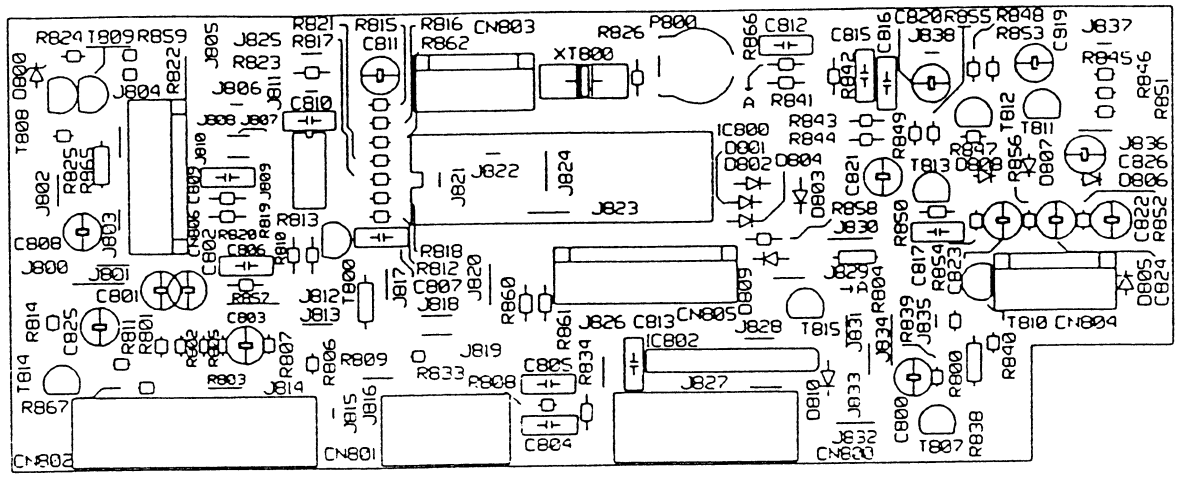

PL2 CONTROLLER BOARD

4. Rotate the BRIGHTNESS Control to both extremes to be sure the high voltage does not exceed the limit of 25.0 KV (20"; 27.5 KV), under any conditions.

HORIZONTAL OSCILLATOR ADJUSTMENT

If there is an indication of unstable horizontal sync. adjust the horizontal freq. with P600. Before the adjustment connect C601 cap. to ground (short circuit) and adjust horiz. freq. to the centre of the pullin range; and remove short circuit on the C601 capacitor.

HORIZONTAL SHIFT ADJUSTMENT

1. Tune in a FUBK test picture (Phillips test pattern)
2. Adjust the horizontal centre with R610 to the centre of the FUBK signal.

VERTICAL AMPLITUDE ADJUSTMENT

1. Tune in a FUBK test picture.
2. Adjust the vertical amplitude with P602 to the optimum amplitude.

OPERATION VOLTAGE

1. Set the BRIGHTNESS, CONTRAST, COLOUR and VOLUME Control to minimum.
2. Adjust operation voltage with P100 to 105 V at C118 cap.

FOCUS ADJUSTMENT

Adjust FOCUS Control on FOCUS PACK for well defined scanning lines in the centre area on the screen.

DELAYED AGC ADJUSTMENT

1. Apply a 60 dB uV PAL Colour Bar Signal to the antenna terminal.
2. Turn AGC Delay Control (P200) on Main Board to fully counter clockwise position.
3. Adjust P200 to get 4.6 V DC voltage on the pin 2 of IC200 (TDA8212).

AFT (AUTOMATIC FINE TUNING) ADJUSTMENT

1. Open the slit between Tuner IF output with IF stage input.
2. Apply 38.9 MHz RF signal to IF input.

3. Connect a DVM at IC800 (pin 9).
4. Adjust AFT voltage with L205 2.5 V at pin 9 (IC800).
5. Close the slit between Tuner IF output with IF stage input with solder.

SIF DETECTOR ADJUSTMENT

1. Tune in programme which has a pure tone (Forexample 400 KHz or 1 KHz) with SIF carrier.
2. Adjust SIF detector coil L206 so that the sound output power goes to maximum.

WHITE BALANCE ADJUSTMENT

1. Tune in a monochrome channel (full white picture) and warm up the set for 15 minutes.
2. Set the R, G, B bias control (black level) P04, P905, P906 to maximum.
3. Set the G, B drive controls P902, P903 to the centre position.
4. Set to maximum BRIGHTNESS, CONTRAST and COLOUR Controls.
5. Connect to ground pin 2 (IC600) via 100K external resistor.
6. Rotate the screen control (UG2) counter clockwise until just visible horizontal line on the screen.
7. Disconnect short circuit at pin 2 (IC600).
8. Set the BRIGHTNESS Control to % 15 black picture (Dark Grey).
9. Adjust this picture with P904, P905, P906 to real grey picture until no remains any colour.
10. Set the BRIGHTNESS and CONTRAST Controls to maximum. Set the G, B drive P902, P903 to white picture until no remains any colour.

ADJUSTMENT POINTS ON THE CHASSIS

TEA2019

POWER ON MODE	STAND BY MODE
Pin 1 = 3.15 V	Pin 1 = 3.73 V
Pin 2 = 7.47 V	Pin 2 = 8.42 V
Pin 3 = 7.65 V	Pin 3 = 8.77 V
Pin 4 = 3.20 V	Pin 4 = 2.97 V
Pin 5 = 21 mV	Pin 5 = 12 mV
Pin 6 = 2.33 V	Pin 6 = 2.34 V
Pin 7 = 0 V	Pin 7 = 0 V
Pin 8 = 3.72 V	Pin 8 = 3.98 V
Pin 9 = 3.61 V	Pin 9 = 4 V
Pin 10 = 3.70 V	Pin 10 = 4.17 V
Pin 11 = 0 V	Pin 11 = 0 V
Pin 12 = 54 mV	Pin 12 = 11 mV
Pin 13 = 4.56 V	Pin 13 = 4.56 V
Pin 14 = 4.56 V	Pin 14 = 4.56 V

TEA2014A

Pin 1 = 0 V	Pin 5 = 9.5 V
Pin 2 = 2.93 V	Pin 6 = 2.84 V
Pin 3 = 4.24 V	Pin 7 = 11.40 V
Pin 4 = 8.8 V	Pin 8 = 2.18 V

TDA1905

Pin 1 = 8.58 V	Pin 9 = GND
Pin 2 = 3.67 V	Pin 10 = GND
Pin 3 = 8.8 mV	Pin 11 = GND
Pin 4 = 3.67 V	Pin 12 = GND
Pin 5 = 9.3 mV	Pin 13 = GND
Pin 6 = 2.84 V	Pin 14 = GND
Pin 7 = 0 V	Pin 15 = GND
Pin 8 = 2.18 V	Pin 16 = GND

PCA84C640P

Pin 1 = 4.18 V	Pin 22 = 0 V
Pin 2 = 2.25 V	Pin 23 = 0.19 V
Pin 3 = 3.04 V	Pin 24 = 2.2 V
Pin 4 = 3.2 V	Pin 25 = 0.29 V
Pin 5 =	Pin 26 = 0.250 V
Pin 6 = 4.68 V	Pin 27 = 0.198 V
Pin 7 = 20 mV	Pin 28 = 5 V
Pin 8 = 20 mV	Pin 29 = 4.7 V
Pin 9 = 2.44 V	Pin 30 = 0 V

IC VOLTAGE CHART

TDA8212

Pin 1 = 461 mV
Pin 2 = 2.62 V
Pin 3 = 8.45 V
Pin 4 = 0 V
Pin 5 = 3.6 V
Pin 6 = 3.6 V
Pin 7 = 0 V
Pin 8 = 2.8 V
Pin 9 = 5.10 V
Pin 10 = 6 V
Pin 11 = 2.92 V
Pin 12 =
Pin 13 = 0 V
Pin 14 = 2.85 V
Pin 15 = 3.25 V
Pin 16 = 3.24 V
Pin 17 =
Pin 18 = 4.65 V
Pin 19 = 4.65 V
Pin 20 = 3.5 V

TDA8217

Pin 1 = 3.51 V
Pin 2 = 7.8 V
Pin 3 = 3.13 V
Pin 4 = 1.51 V
Pin 5 = 3.13 V
Pin 6 = 2.35 V
Pin 7 = 9.6 V
Pin 8 = 4.85 V
Pin 9 = 5 V
Pin 10 = 2.94 V
Pin 11 = 0 V
Pin 12 = 3.50 V
Pin 13 = 7.16 V
Pin 14 = 4.1 V
Pin 15 = 0 V
Pin 16 = 5.15 V
Pin 17 = 4.19 V
Pin 18 = 4.23 V
Pin 19 = 4.1 V
Pin 20 = 9.6 V

TDA8215

Pin 1 = 9.9 V
Pin 2 = 2.46 V
Pin 3 = 23.2 V
Pin 4 = 8.49 V
Pin 5 = 0 V
Pin 6 = 0 V
Pin 7 = 0.64 V
Pin 8 = 0.47 V
Pin 9 = 23.35 V
Pin 10 = 13.35 V
Pin 11 = 5.1 V
Pin 12 = 4.77 V
Pin 13 = 2.61 V
Pin 14 = 4.84 V
Pin 15 = 0 V
Pin 16 = 0 V
Pin 17 = 3.49 V
Pin 18 = 0.12 V
Pin 19 = 1.51 V
Pin 20 = 2.38 V

TDA8196

Pin 1 = 6.19 V
Pin 2 = 12.44 V
Pin 3 = 8.67 V
Pin 4 = 2.6 V
Pin 5 = 4 mV
Pin 6 = 2.48 V
Pin 7 = 2.39 V
Pin 8 = 2.37 V

Pin 10 = 3.45 V
Pin 11 = 0.68 V
Pin 12 = 3.53 V
Pin 13 = 5 V
Pin 14 = 5 V
Pin 15 = 5 V
Pin 16 = 5 V
Pin 17 = 5 V
Pin 18 = 0.90 V
Pin 19 = 5 V
Pin 20 = 5 V
Pin 21 = 0 V

Pin 31 =
Pin 32 =
Pin 33 = 5 V
Pin 34 = 5 V
Pin 35 = 5 V
Pin 36 = 0 V
Pin 37 = 0 V
Pin 38 = 0 V
Pin 39 = 5 V
Pin 40 = 5.13 V
Pin 41 = 0 V
Pin 42 = 5 V

TDA8138

Pin 1 = 16.37 V
Pin 2 = 16.37 V
Pin 3 = 5 V
Pin 4 = 4.63 V
Pin 5 =
Pin 6 = 3.21 V
Pin 7 =
Pin 8 = 11.85 V
Pin 9 = 5.1 V

WIRING CONNECTION

OSCILLOSCOPE WAVE FORMS

BLOCK DIYAGRAM

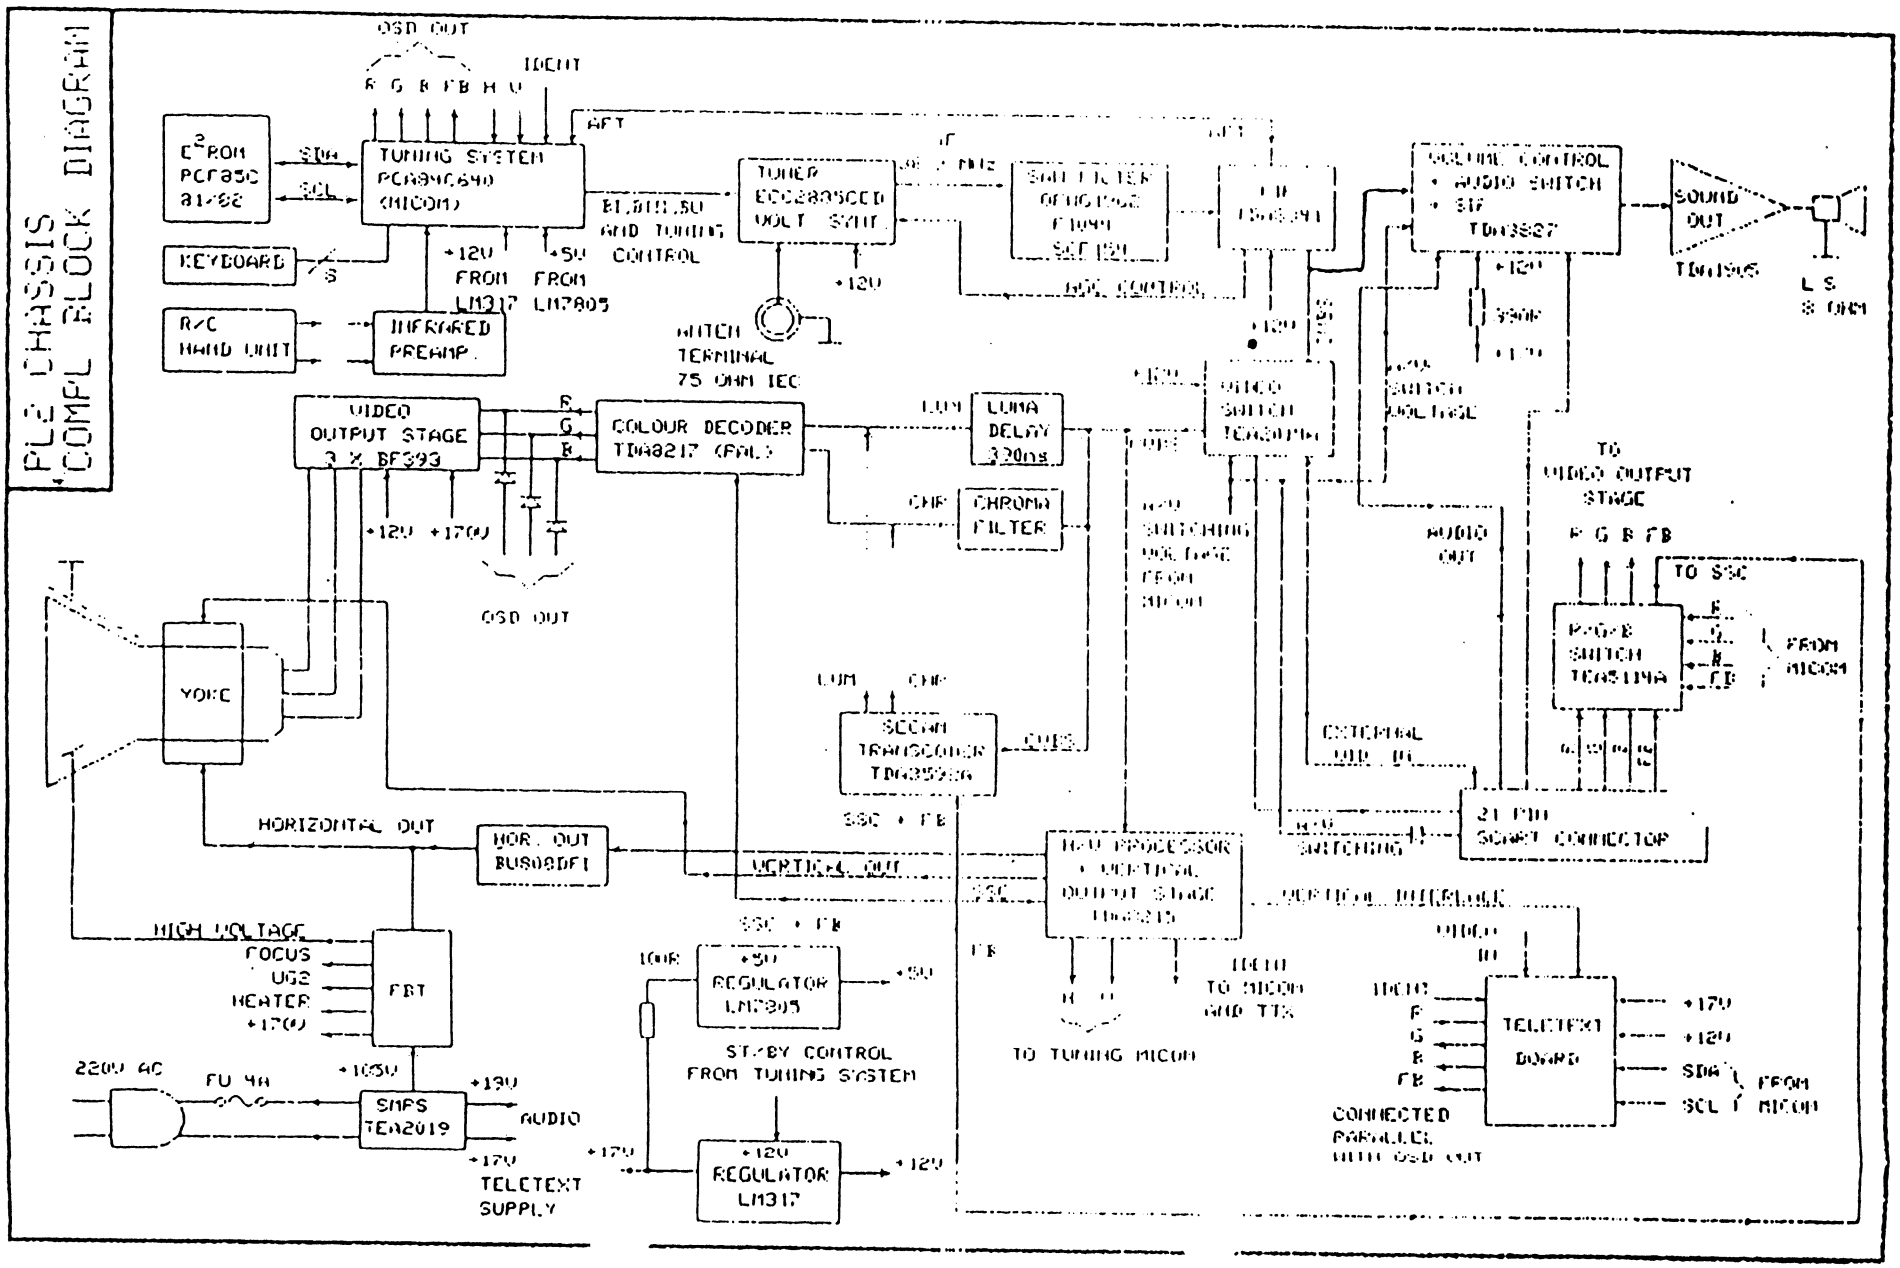

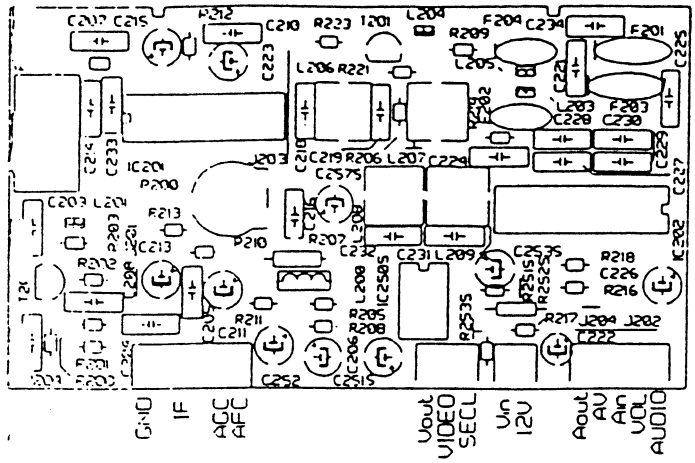

PL2 IF BOARD

WAVE FORMS

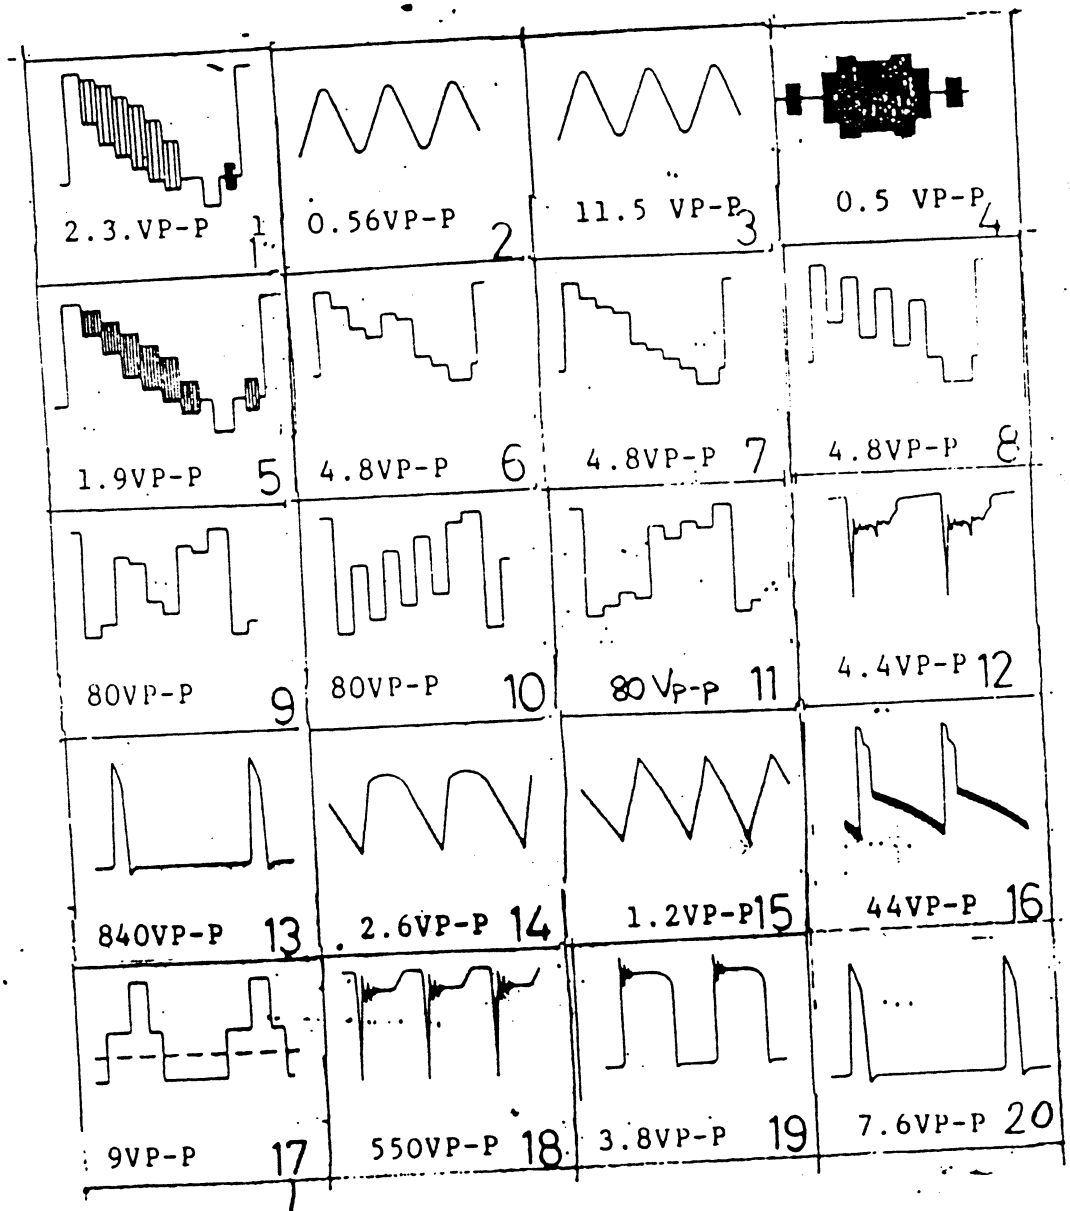

EXAMPLE: PLEASE REFER TO THE CIRCUIT DIAGRAM TO FIND THE TEST POINTS.

FIGURE E

PICTURE IF SWEEP ALIGNMENT

1. Open the slit (IF Output terminal of TUNER)
2. Connect the "Output Terminal" of the sweep/marker generator to the IF input on Main Board.
3. Connect the "DET. IN" with direct probe to pin 14 of IC200 (TDA8212) on Main Board.
4. Adjust L204 for max. gain at 38.9 MHz on scope.

INSTALLATION AND SERVICE ADJUSTMENT

GENERAL INFORMATIONS

All adjustments are thoroughly checked and corrected when the receiver leaves the factory. Therefore the receiver should operate normally and produce proper colour and B/W picture upon installation. However, several minor adjustments may be required depending on the particular location in which the receiver is operated.
This receiver is shipped completely in cardboard carton. Carefully draw out the receiver from the carton and remove all packing materials.
Plus the power cord into a convenient 220 Volts 50 Hz AC two pin power outlet or frequency.
Check and adjust all the customer controls such as BRIGHTNESS, CONTRAST and COLOUR Controls to obtain natural colour or B/W picture.

AUTOMATIC DEGAUSSING

A degaussing coil is mounted around the picture tube so that external degaussing after moving the receiver is normally unnecessary providing the receiver is properly degaussed upon installation. The degaussing coil operates for about 1 second after the receiver is switched ON. If the set is moved or faced in different directon, the power switch must be switched off at least 10 minutes in order that the automatic degaussing circuit operates properly.
Should the chassis or parts of the cabinet become magnetized to cause poor colour purity, use an external degaussing coil. Slowly move the degaussing coil around front of the receiver and slowly withdraw the coil to distance of about 2 m before disconnecting it from AC source. If colour shading still persists, perform the COLOUR PURITY ADJUSTMENT and CONVERGENCE ADJUSTMENTS procedures, as mentioned later.

HIGH VOLTAGE CHECK

CAUTION: There is no HIGH VOLTAGE ADJUSTMENT on this chassis. The +105 volt power supply must be properly adjusted to insure the correct high voltage.

1. Connect an accurate high voltage meter to the anode of the picture tube.
2. Turn on the receiver. Set the BRIGHTNESS and CONTRAST Controls to minimum (zero beam current).
3. High voltage will be measured below 24.5 KV (20"; 25.5 KV)

TELRA CTV
SCHEMATIC DIAGRAM

DEVRE ŞEM

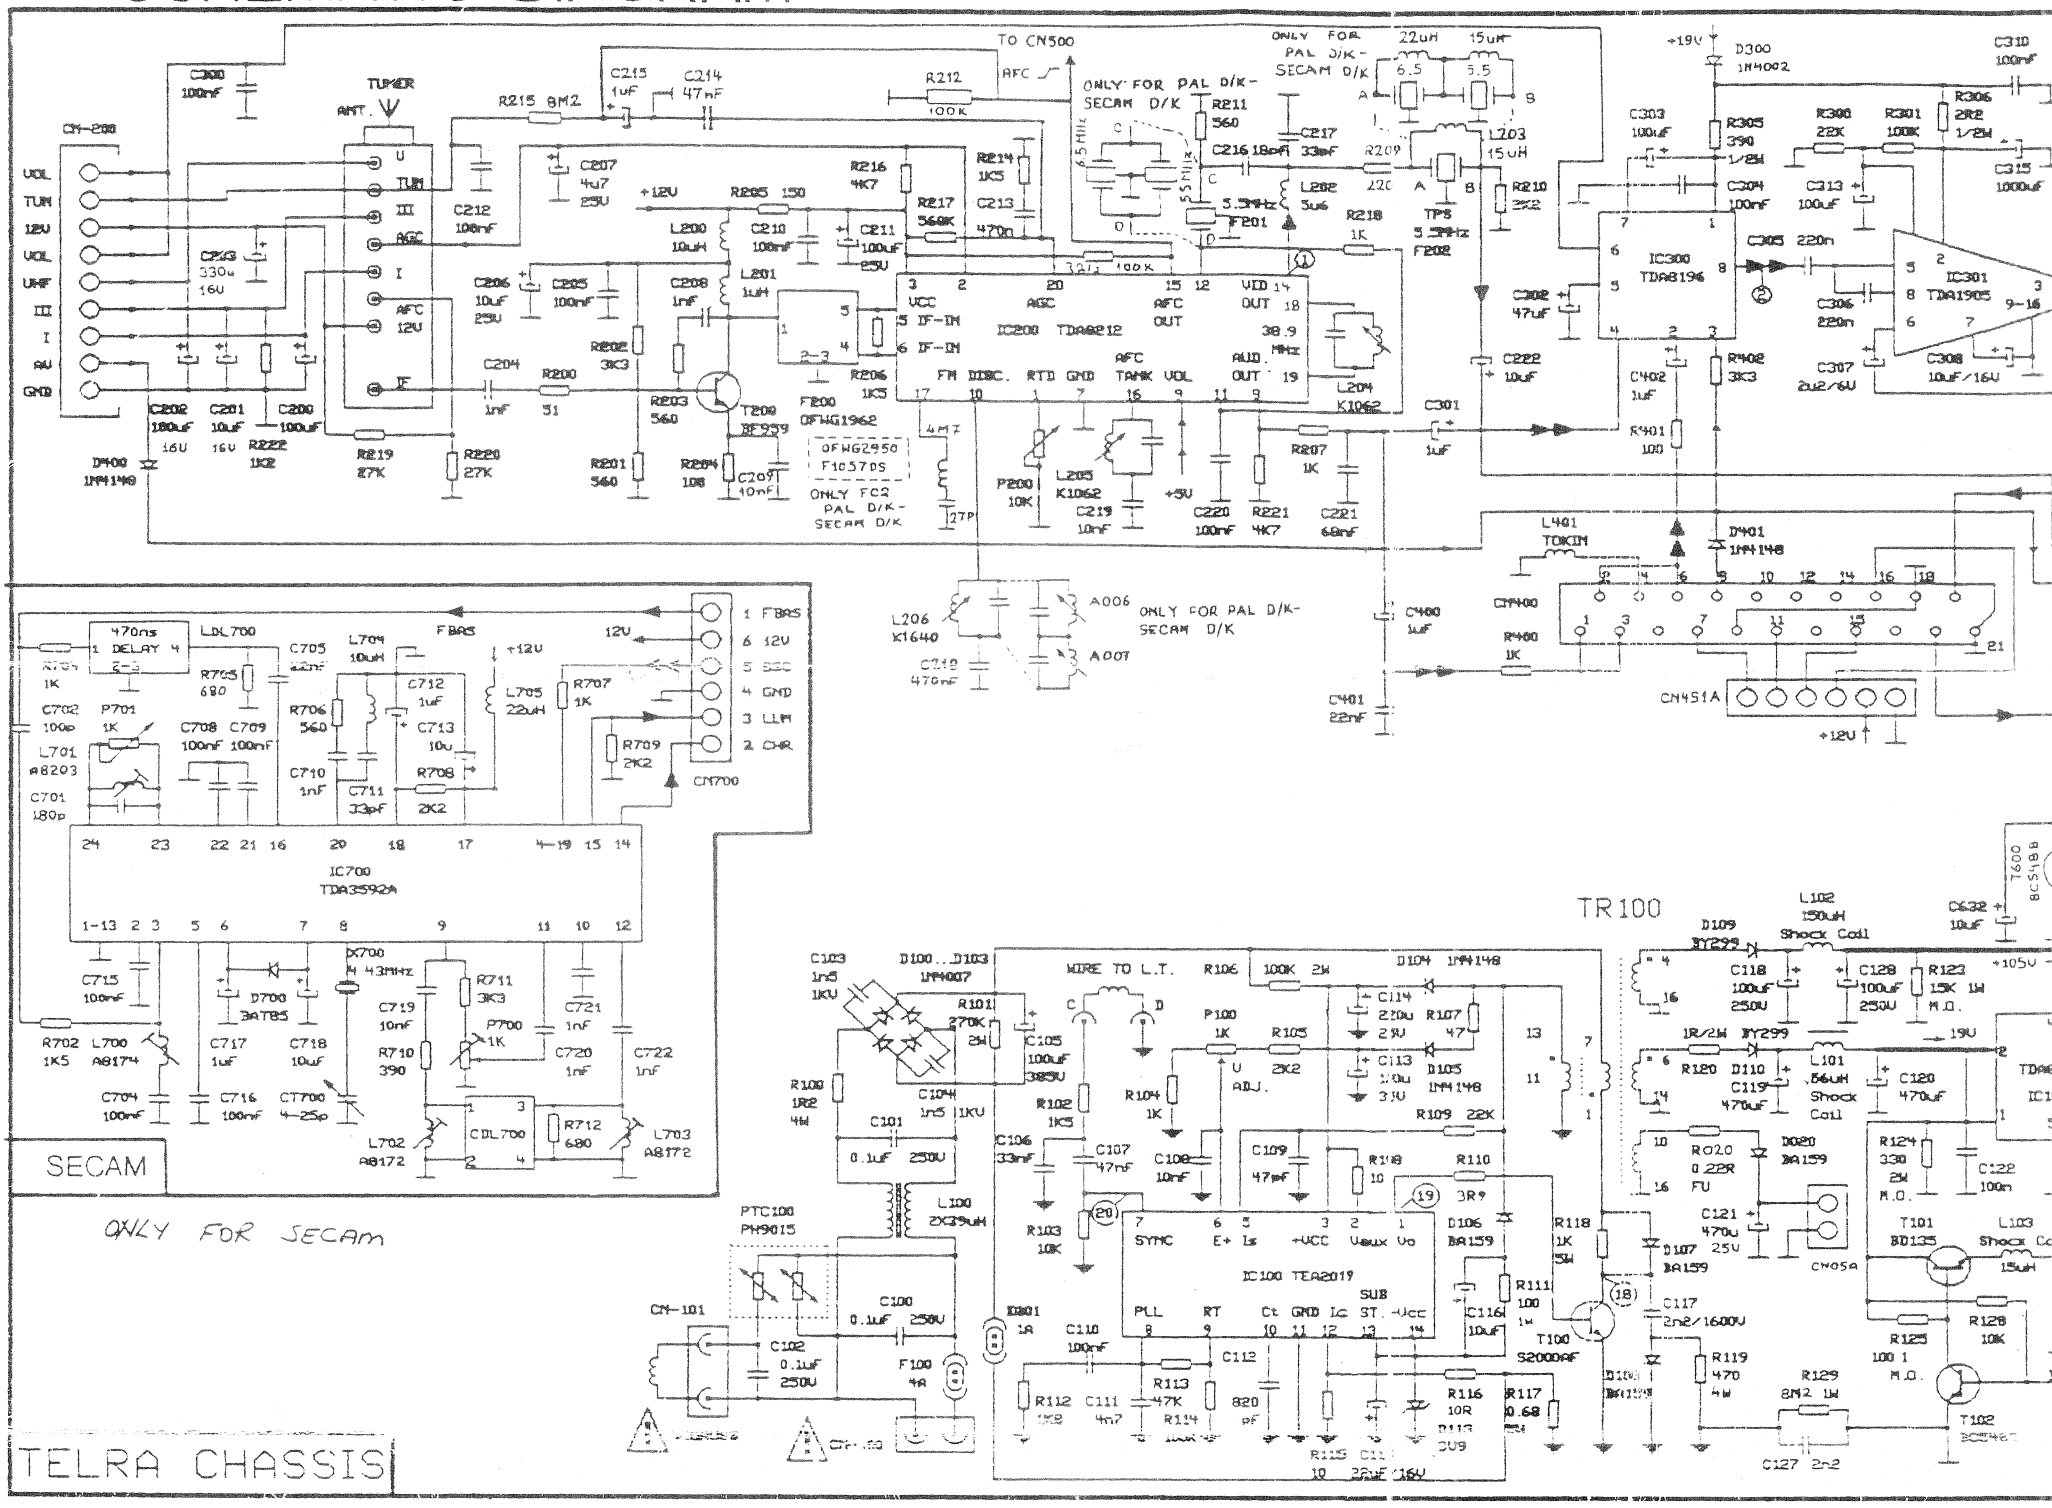

VE * İŞARETLİ DİRENÇLERİN DEĞERLERİ KULLANILAN TÜBÜN CİNSİNE GÖRE DEĞİŞTİRİLECEKTİR.

* İŞARETLİ KONDANSATÖRÜN DEĞERİ KULLANILAN TÜBÜN CİNSİNE GÖRE DEĞİŞTİRİLECEKTİR.

BU MALZEMELERİN FARKLI DEĞERLERİ İÇİN TABLOYA BAKINIZ.

ŞEMASI

TUBE NO.	C625 (1.6KV)	R644	R645	TUBE SOCKET	LIN COIL
A51-230X NOKIA	9.1nF	1K8#	1K8@	NARROW NECK	57uH
A48KCS12XX GOLDSTAR	8.2nF	1K8#	1K8@	NARROW NECK	57uH
A48JRV90X01 ORION	10nF	1K8#	1K8	NARROW NECK	57uH
A48KCS12X01 GOLDSTAR	8.2nF	1K8#	1K8	NARROW NECK	57uH
A51JSY61X03 HITACHI	9.1nF	1K8#	1K8@	NARROW NECK	57uH
51GG95X-TC SAMSUNG	9.1nF	1K8#	1K8@	NARROW NECK	57uH
A48JRV50X64 ORION	8.2nF	1K8#	1K5	NARROW NECK	57uH

RESMİ YUKARI KAYDIRMAK İÇİN #
İŞARETLİ DİRENCİN BACAĞINI KESİN.

RESMİ AŞAĞI KAYDIRMAK İÇİN @
İŞARETLİ DİRENCİN BACAĞINI KESİN.

CUT THE LEAD OF RESISTOR MARKED WITH # IN ORDER TO SHIFT PICTURE UP

CUT THE LEAD OF RESISTOR MARKED WITH @ IN ORDER TO SHIFT PICTURE DOWN

THE VALUES OF RESISTORS MARKED ## & ### ARE DIFFERENT ACCORDING TO THE CRT TYPES

THE VALUE OF CAPACITOR MARKED X IS DIFFERENT ACCORDING TO THE CRT TYPES

PLEASE LOOK AT THE TABLE FOR THE VALUES OF THESE COMPONENTS

TELRA R/C

TELRA CRT

RGB

065 031 000310

(MAIN) ANA PCB

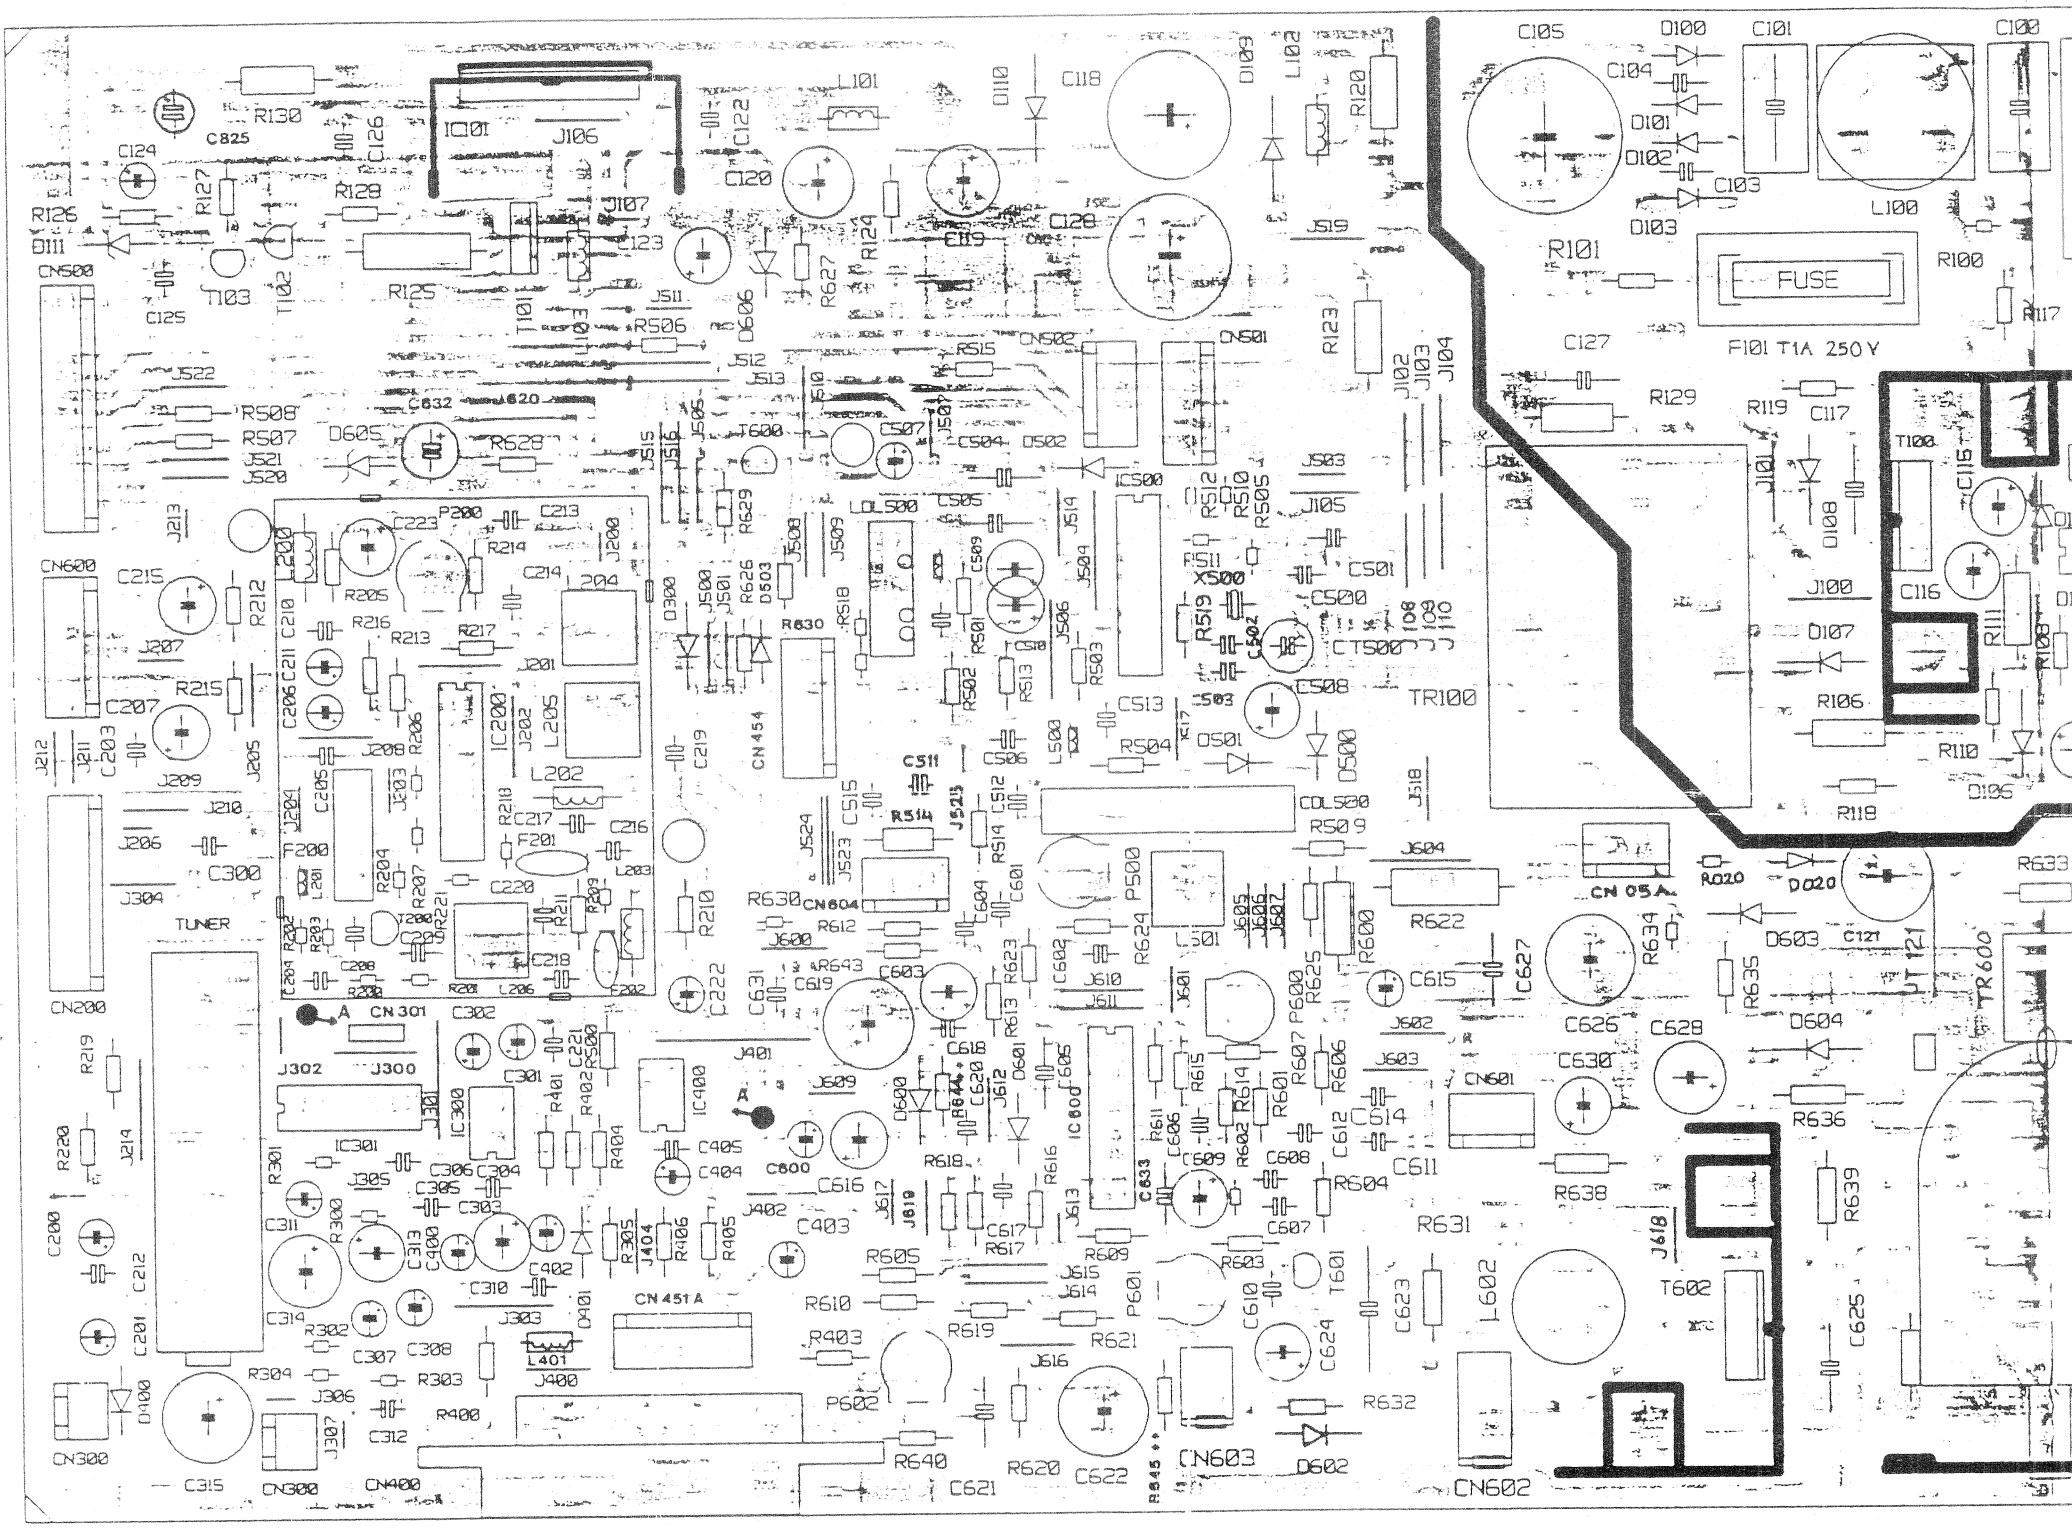
FUSE
F101 T1A 250V
TUNER
CN200
CN300
CN301
CN400
CN451A
CN500
CN501
CN502
CN600
CN601
CN602
CN603
CN604
CN05A
TR100
T602
IC101
IC200
IC301
IC400
IC600
J106
J107
J302
J300
J303
J400
J401
J402
J604
J618
L401
L602
P500
P600
P601
P602
X500
CT500
R101
R100
R117
R129
R119
R111
R106
R110
R118
R633
R635
R636
R638
R639
R631
R632
R634
R622
R630
R640
R620
R621
R623
R624
R625
R626
R627
R628
R629
R600
R604
R605
R606
R607
R609
R610
R611
R612
R613
R614
R615
R616
R617
R618
R619
R643
R644
R645
C632
C633
C634
C635
C636
C637
C638
C639
C640
C641
C642
C643
C644
C645
C646
C647
C648
C649
C650
C651
C652
C653
C654
C655
C656
C657
C658
C659
C660
C661
C662
C663
C664
C665
C666
C667
C668
C669
C670
C671

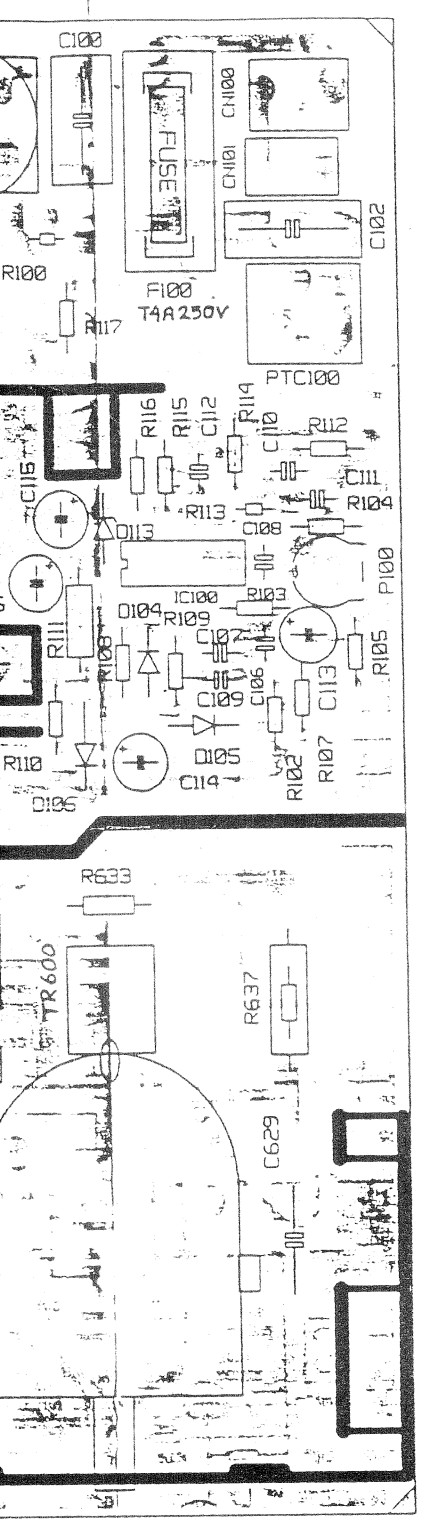

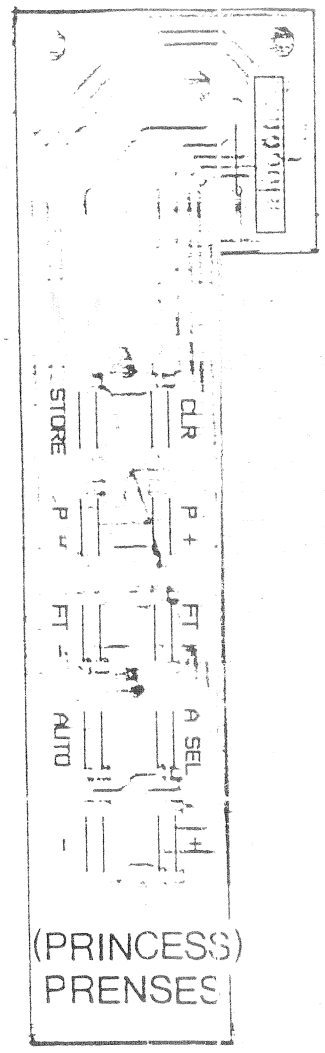

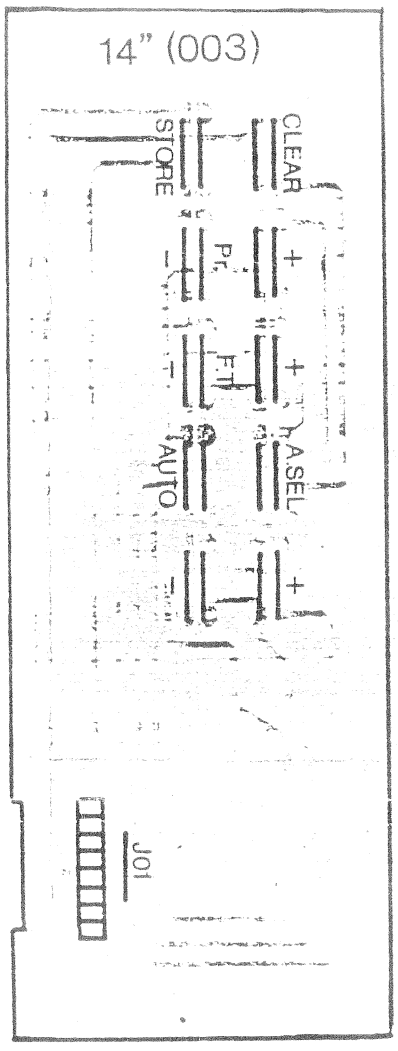

TUŞ TAKIMI (KEYBOARD) PCB'LER (TS)

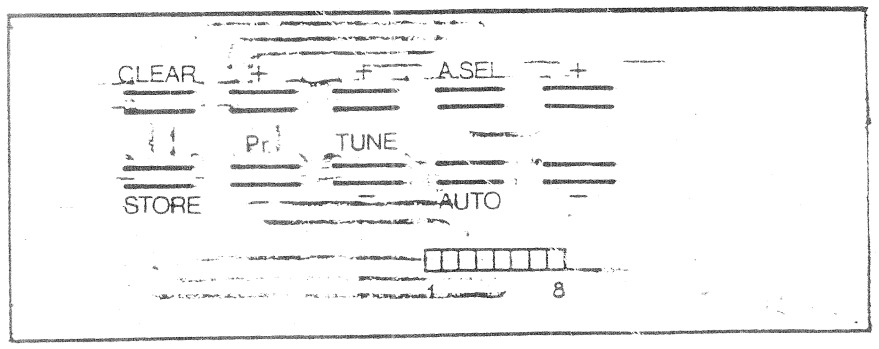

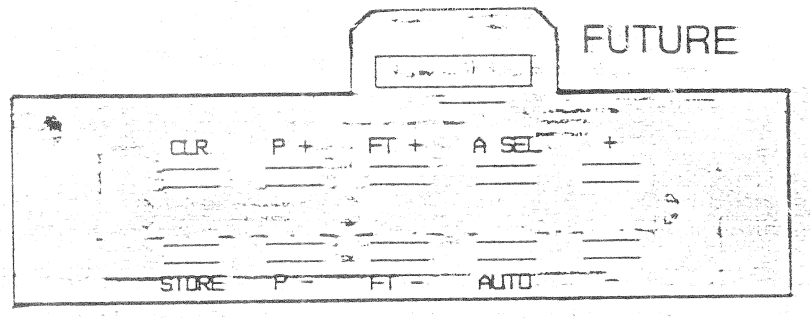

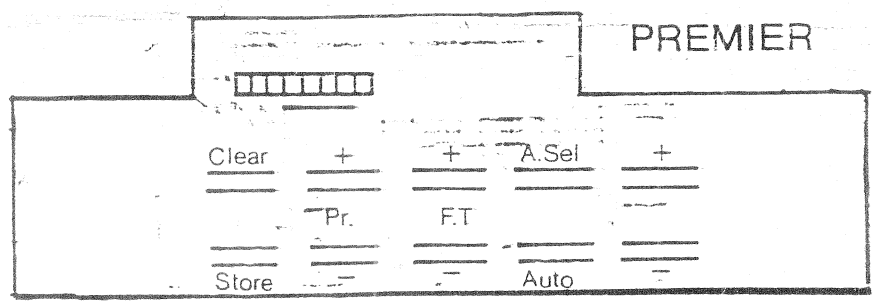

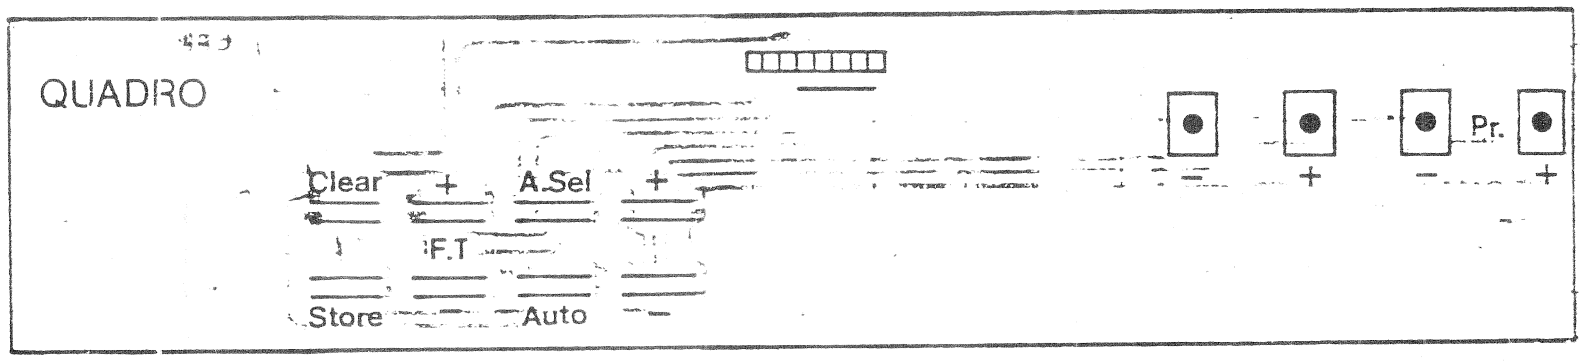

R.G.B. (SCART)

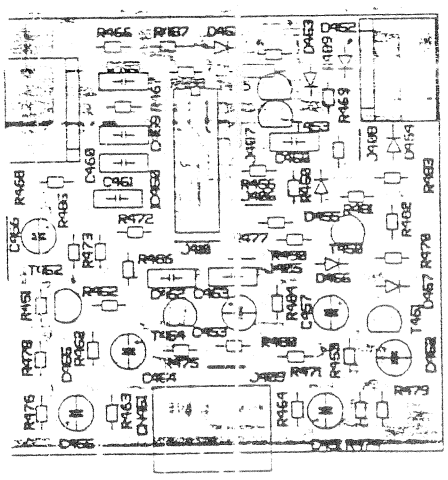

(CONTROLLER) KONTROL PCB

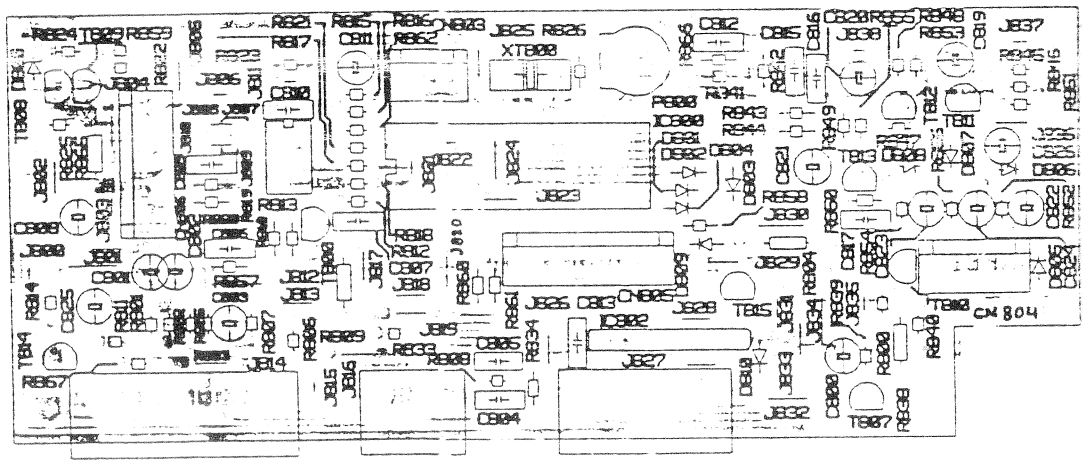

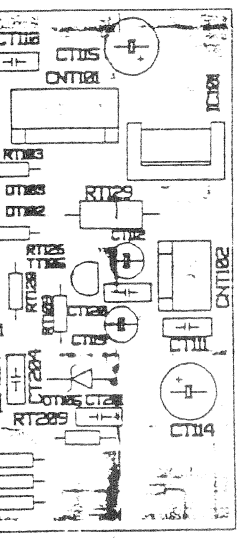

CODE	TV-MODE
00	PROGRAM DIGIT 0
01	PROGRAM DIGIT 1
02	PROGRAM DIGIT 2
03	PROGRAM DIGIT 3
04	PROGRAM DIGIT 4
05	PROGRAM DIGIT 5
06	PROGRAM DIGIT 6
07	PROGRAM DIGIT 7
08	PROGRAM DIGIT 8
09	PROGRAM DIGIT 9
10	ONE/TWO DIGIT ENTRY
12	STANDBY MODE
13	MUTE ON/OFF
14	PERSONAL PREFERENCE
15	TV STATUS
16	VOLUME UP
17	VOLUME DOWN
18	BRIGHTNESS UP
19	BRIGHTNESS DOWN
20	COLOUR UP
21	COLOUR DOWN
28	CONTRAST UP
29	CONTRAST DOWN
32	PROGRAM UP
33	PROGRAM DOWN
38	SLEEP TIMER
56	AV
63	TV

M DECODER PCB